

WOOD



**Modern Home**      Product data sheet



**TECHNICAL INFORMATION**



Thickness (mm)	14
Width (mm)	190/188
Length (mm)	1240/2510/2525
Wearlayer thickness (mm)	3,6
Weight (kg/m2)	8,0

**Taber Abraser/Lacquer's wear resistance**

ENV 13696/SIS 923509 abrasion penetration (revs)	~7000
abrasive wear (mg/100revs)	~3,5

**Reduction of sound weighted index "footfall" to the room below.**

NF EN ISO 140-8/ Acc to NF EN ISO 717-2, $\Delta L_w$ in dB	
with cork underlay	17
with 3 mm Cellfoam	17

**Formaldehyde emission\*\***

EN 13986	E1
----------	----

**Fire safety class\*\***

NT Fire 007	Class G
-------------	---------

**Thermal insulation value**

( $R_T$ m <sup>2</sup> K/W)	
board only	0,101
with rag felt	0,121
with 3 mm Cellfoam	0,191
with cork underlay	0,161


**Installation\***

Floating/  
Glue down

**Underfloor heating compatible\*\*\***

Low temperature, waterborne system or self-regulating electrical system

\* Contact your flooring supplier for further information.  
\*\* Preliminary for Proteco Natura  
\*\*\* Not suitable for the wood species beech and maple

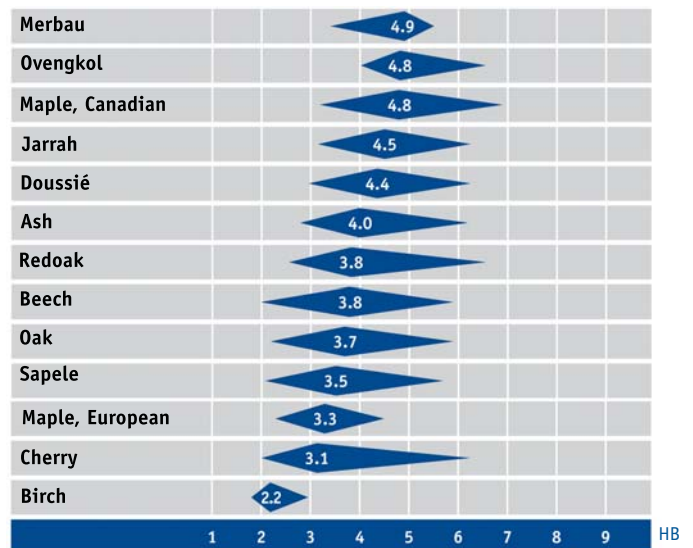

	MODERN HOME Salsa		lacquer	oil	natura	lacquer combiloc		natura combiloc		lacquer combiloc halflength
	HOME									
oak select	•		•							•
oak nature	•		•		•					
oak rustical	•		•						•	
oak robust, whiteoiled	•		•							
redoak	•									
ash select	•		•							
ash nature	•		•		•					
ash nature whiteoiled	•		•							
ash contract	•									
maple european	•		•							
maple select	•									
maple nature	•				•				•	
birch	•								•	
cherry	•		•		•				•	
beech nature	•		•		•					•
beech classic	•								•	
beech select	•									
beech contract	•									
jarrah	•									
merbau	•			•		•				•
ovengkol	•									
sapele	•								•	
doussié	•									
walnut	•									

	MODERN HOME Bravo		lacquer ultraloc	oil ultraloc
	HOME			
oak	•		•	
ash	•		•	
maple	•			
birch	•			
beech	•		•	

